



PPR Pipe Extrusion Line

PPR 管材押出整線

TwinScrew

振法機械廠股份有限公司
Twin Screw Industrial Co., Ltd.

744台南市新市區大營里340號
No. 340, Daying, Xinshi Dist.,
Tainan City 744, Taiwan
Tel: +886-6-5014056 (Rep)
Fax: +886-6-5013805
E-mail: twisic@ms37.hinet.net

www.twinscrew.net

TwinScrew
Pioneering Twin-Screw Extruder

PPR Pipe Extrusion Line PPR 管材押出整線

PPR pipes are widely used in Europe and America for water supply, heating, and industrial pipelines, known for their high temperature resistance, corrosion resistance, chemical resistance, and environmental friendliness. TWINSREW offers diverse extrusion solutions with rich experience in pipe manufacturing, including cost-effective PPR, HDPE, and PVC pipe extrusion equipment. To meet global market demands, we provide efficient and stable PPR pipe extrusion equipment for pipe diameters from 16mm to 110mm, along with drying and feeding systems. Customized solutions are available to meet specific customer requirements.

PPR管是歐美現在最普遍使用的水管材料之一，廣泛應用於家庭供水、供暖系統和工業管線。它具有耐高溫、耐腐蝕、耐化學性及環保等特點，非常適合用於住宅、商業建築和工業系統的管道。TWINSREW的多樣化管道押出設備方案，在管道設備製造方面擁有豐富經驗，針對熱水管需求，提供多樣化的設備選擇。除了HDPE和PVC管押出設備，我們還提供更具經濟效益的PPR管押出設備，讓客戶有更多選擇。為滿足全球市場需求，我們開發了高效穩定的PPR管押出設備。針對常見的PPR管徑（外徑16毫米至110毫米）提供完整的押出生產設備及周邊設施，包括乾燥系統和供料系統，同時提供量身定制的生產解決方案，以滿足客戶的特殊需求。

Specifications	Suitable pipe dia	Production capacity
押出機規格	生產管徑	產能
65-33D	20~63 mm	100~150kg/hr
75-33D	50~90 mm	150~250kg/hr
85-33D	63~110 mm	250~350kg/hr
100-33D	75~160 mm	350~500kg/hr

Output 押出產能:90~480 kg

Pipe diameter from range 管徑範圍: 16-110 mm

Specifications	Spec, aka...	Pipe OD
PPR管規格	規格另稱	管子外徑
20	4分 inch	20 mm
25	6分 inch	25 mm
32	1寸 inches	32 mm
40	1.2寸 inches	40 mm
60	1.5寸 inches	50 mm
63	2寸 inches	63 mm
76	2.5寸 inches	75 mm
90	3寸 inches	90 mm
110	4寸 inches	110 mm



Cutter
鋸機



Profile Caterpillar Haul-off
履帶式引取機



Vacuum Spray Water
Cooling Tank 真空噴霧水槽




Die Head
押出模頭



Single Screw Extruder
(Sub-extruder) 副料押出機



Operation Control System
操作控制系統

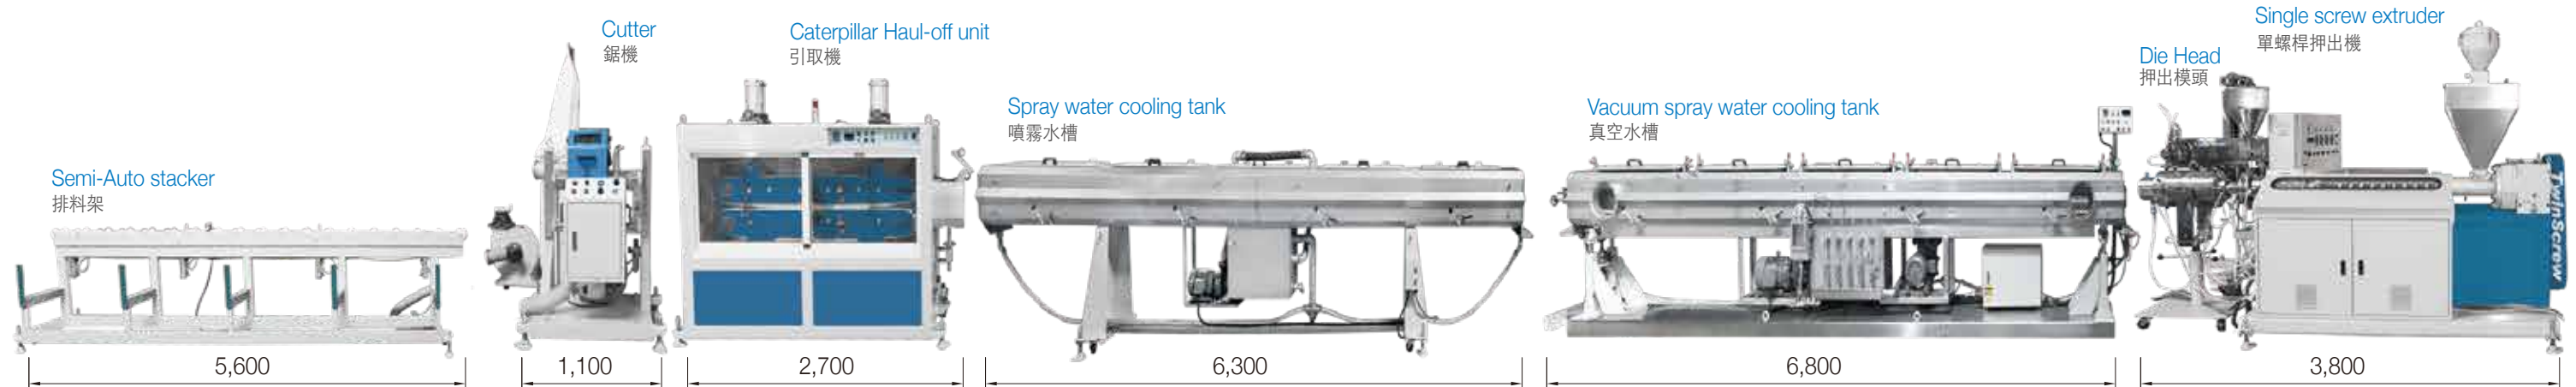

Unit 單位: mm